

### 3-D PROPERTIES OF PULSED CORONA STREAMERS

van Veldhuizen E.M.<sup>a</sup>, Nijdam S.<sup>a</sup>, Luque A.<sup>b</sup>, Brau F.<sup>b</sup>, and Ebert U.<sup>a,b</sup>



a) Dept. Applied Physics, Technische Universiteit Eindhoven, PO Box 513,  
5600 MB Eindhoven, The Netherlands

b) Centrum Wiskunde & Informatica, PO Box 94079, 1090 GB Amsterdam, The Netherlands

**Abstract.** Properties of pulsed corona streamers are measured and simulated in three dimensions (3D). Stereophotography is used to measure branching angles and to investigate whether apparent streamer reconnections are real. 3D simulations of two parallel streamers show electrostatic repulsion, but they also can merge due to photoionization. Other aspects of streamer interactions become evident through theoretical investigations of a periodic array of streamers.

#### 1. INTRODUCTION

Pulsed corona discharges can form very complex patterns<sup>1-2</sup>. Figure 1a shows a photo of a discharge in quite pure nitrogen where the electrodes are a needle above and a plate below, i.e., the electrode geometry is cylindrically symmetric. Therefore the figure shows a two-dimensional projection of a three-dimensional event. From the needle a number of streamers emerge that branch repeatedly until more than 100 streamers have formed in the middle between the electrodes. Streamers branch after a characteristic length and with a characteristic distribution of angles, they probably repel each other, but there are also events where they seem to reconnect. Figure 1b shows streamers emerging from a wire on the right and propagating to a plane on the left. The figure shows reconnections as well. Photos of streamers emerging from a row of pins<sup>3</sup> inserted into a planar electrode resemble those of wire plane configurations<sup>5-6</sup>.

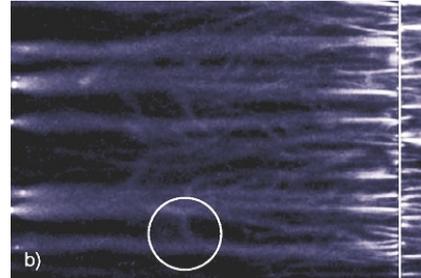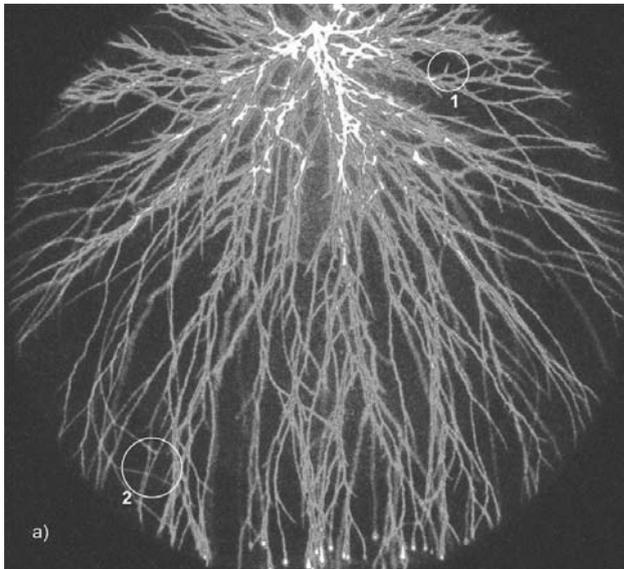

**FIGURE 1a).** ICCD image of a point-plane corona in a 16 cm gap at 400 mbar in nitrogen with about 0.2 % oxygen<sup>14</sup>. The streamers are thinner than in air, form very short branches, e.g. in circle 1, and possibly reconnect, see circle 2.


**FIGURE 1b).** Streamers in a 5 cm wire-plane discharge in air also show reconnections<sup>6</sup>. Further only a small fraction of the streamers that initiate at the wire reach the cathode.

<sup>a</sup> Electronic address: [e.m.v.veldhuizen@tue.nl](mailto:e.m.v.veldhuizen@tue.nl)

It is clear that branching and interaction of streamers are intrinsically three-dimensional events. However, photographs as Figure 1 show only a two-dimensional projection and most simulations are constrained to the cylindrical symmetry of a single streamer<sup>7-10</sup> and cannot handle full branching or interaction of streamers. 3D simulations of streamer branching are presented in Refs. 11-13 and in forthcoming work by the authors. We here report experimental and theoretical investigations of the three-dimensional aspects, in particular, stereoscopic imaging, simulations of the interaction of two streamers and a first comparison with experiments, and the analysis of an array of streamers.

## 2. STEREOGRAPHIC IMAGING IN EXPERIMENTS

The apparent reconnections in fig. 1 require further investigation. Streamer discharges are usually (as in fig. 1) imaged with conventional or digital cameras<sup>1-7</sup>. This leads to 2D projection of an essentially 3D phenomenon. These 2D projections can be difficult to interpret. For example, it is impossible to see whether an apparent reconnection is really what it seems to be. It is also impossible to get a complete picture of the 3D spatial structure and to measure branching angles. To resolve this matter, we have implemented stereo-photography which makes it possible to image streamer discharges in 3D. The stereoscopic technique that we use has been around for a long time<sup>15-16</sup> and has been used for many topics. Stereo-photography has also been used to study phenomena similar to streamers, e.g. sparks<sup>17</sup>, flames<sup>18</sup> and dusty plasmas<sup>19</sup>. For precise timing and when only one camera is available, two images at different angles have to be taken with one camera. Figure 2 shows how this is done. The details on how the 3D image is reconstructed from these two images can be found in a recent paper<sup>20</sup>. In short, a straight section of a streamer channel is selected in both images, and the end points of these two lines are reconstructed from two images in 2D (xy) to 3D (xyz).

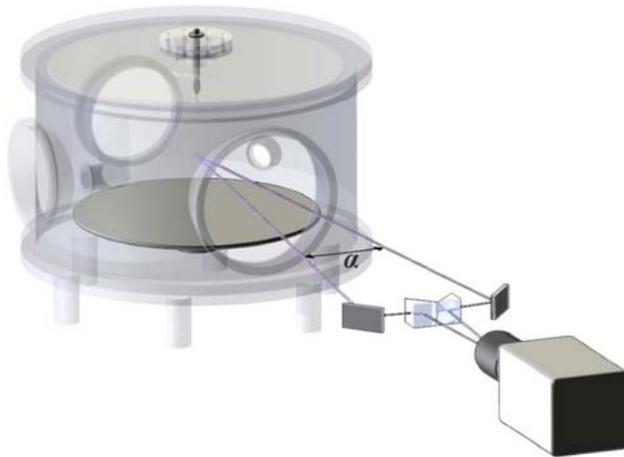

**FIGURE 2.** A stainless steel vessel of 50 cm diameter and 30 cm height is used to create a 16 cm gap in a controlled gas composition. The large side window offers the possibility to view the streamer under two angles. Details on the set-up and its pulsed power supply can be found elsewhere<sup>1,14</sup>.

## 3. THEORY AND SIMULATIONS

The interaction of streamers is theoretically largely unexplored. We present two different studies. On the one hand, a fully 3D code is developed and the interaction of two streamers studied<sup>21</sup>, on the other hand, an array of streamers can be represented with a mathematical trick<sup>22</sup> within a 2D simulation.

A three-dimensional simulation for streamers has been developed<sup>21</sup> based on cylindrical coordinates  $(r, z, \varphi)$ . The coordinates  $r$  and  $z$  are represented in adaptively refined grids, allowing a fine resolution of the space-charge layer. The angular coordinate  $\varphi$  is discretized uniformly, and a Fourier transform is performed over  $\varphi$ . Each Fourier mode now can be solved on a different processor, taking advantage of multiprocessor machines. This discretization is quite accurate close to the axis, and we constrain evaluations to this case.


In another model, we analyze a periodic array of parallel streamers in a homogeneous high field, details of this work can be found in the preprint 22. We assume that either the external circuit is high-Ohmic or that the gap is sufficiently long; in this case the streamers can approach uniform translation, in contrast to a single streamer. We allow the streamer shape to adjust dynamically. Such an array of streamers with fixed period can be created experimentally by an array of needle electrodes inserted into a plate<sup>3</sup>. Here and in [22], we study the two-dimensional version of this problem, because we expect it to be qualitatively similar, but easier to study in this first analysis, and because the two-dimensional problem actually exhibits very interesting similarities with Saffman-Taylor fingers in two fluid flow in Hele-Shaw cells that casts a new light on this classical selection problem.

#### 4. RESULTS

##### Stereo-photography:

Stereophotography allows one to analyze whether apparent reconnections as in Fig. 1 are real. Figure 3 shows one example where an apparent reconnection is shown to be fake. However, other cases are real.

Stereophotography also allows one to investigate the branching angle that can not be obtained from 2D projections. We have determined histograms of the measured branching angles for 200, 565 and 1000 mbar and combined the results for all pressures into one histogram<sup>20</sup>. The distribution of the angles is roughly Gaussian, with average values between 39° and 46° and standard deviations of 11° to 13°. The average branching angle shows a slight decrease as a function of pressure. However, it is not clear whether this is statistically significant due to the limited amount of data points (about 35 points per pressure).

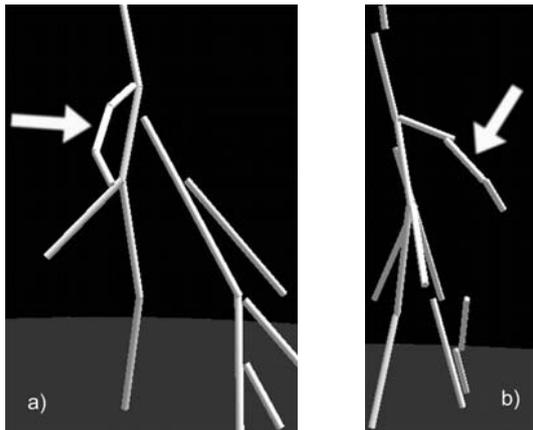

**FIGURE 3a).** The front view of a streamer that appears to reconnect as in circle 2 of fig. 1a.


**FIGURE 3b).** The reconstructed side view that clearly indicates that reconnection does not occur.

This measurements is performed with a positive voltage of 47 kV, a rise-time of about 30 ns in a point-plane gap of 14 cm. The atmosphere in the vacuum vessel consisted of ambient air at a pressure of 200 mbar.

The figure is taken from Ref. 20.


##### 3-D simulations:

In all simulations discussed here the pressure is taken 1 bar. We use two identical Gaussian seeds of 70  $\mu\text{m}$  and amplitude  $1.4 \cdot 10^{10} \text{ cm}^{-3}$  separated by a distance of 230  $\mu\text{m}$  as an initial condition. They are exposed to a homogeneous and constant background electric field  $E_b = 80 \text{ kV/cm}$  in the positive  $z$  direction. The streamers plotted on reduced length, time and density scales are similar to each other if photo-ionization is neglected. The simulations were performed with an angular resolution of  $\theta = 2\pi/64$ , but we also checked that the results are stable when we double the number of angular grid cells. Figure 4a shows a surface of equal electron density for the discharge in nitrogen at normal pressure and temperature at time  $t = 1.56 \text{ ns}$ . Figure 5 shows the space charge layers at the streamer heads (more precisely, the half maximum line at the respective time is shown) in the plane intersecting the two streamer axes in timesteps of 0.12 ns. The calculations are performed in nitrogen with oxygen concentrations varying from 10% to 100 ppm. Experiments with the same variation in oxygen content are in preparation.

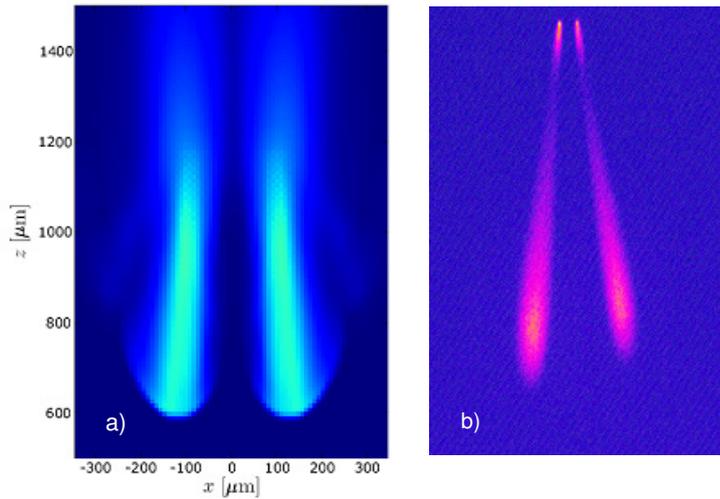

**FIGURE 4a).** Two negative streamers in nitrogen at atmospheric pressure advancing downwards and repelling each other; shown are surfaces of constant electron density in an advanced state of evolution within a constant background field.

**FIGURE 4b).** Experimental observation of positive streamers emerging from two anode pins<sup>23</sup> in air at 400 mbar and 48 kV in a 10 cm gap. The distance between the needle tips is 0.2 cm.

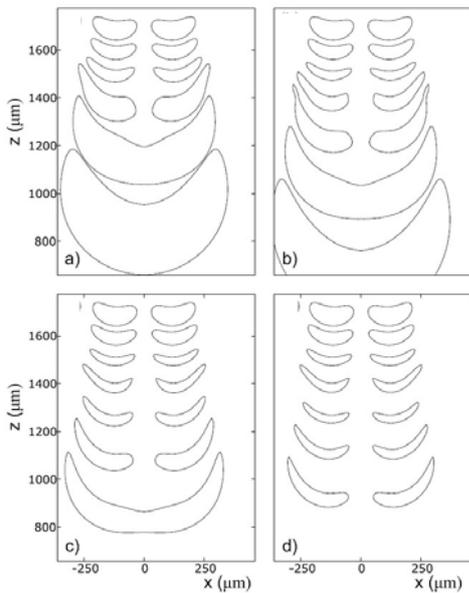


**FIGURE 5.** Evolution of the space charge layers of two adjacent streamers at atmospheric pressure, but different concentrations of  $O_2$ :  $p_{O_2} = 10^{-1}, 10^{-2}, 10^{-3}, 10^{-4}$  in panels (a)–(d).

Fig 5a is quite close to ambient air and 5c is approximately the mixture used in the experiments reported in Refs. 2, 14. The calculations show that the streamer diameter becomes smaller with decreasing oxygen content, which is in agreement with the measurements<sup>14</sup>. In the experiments it is also observed that merge, but only at pressures below 200 mbar (at the fixed tip separation of 0.2 cm).

The figure is taken from Ref. 21.

Periodic array of streamers:

The simulations<sup>22</sup> show that after initial transients the streamers in the array will either branch in a similar way as a single streamer<sup>24, 25</sup>, if the period  $L$  is large, else they will approach a mode of uniform translation that does not occur for single streamers; an example is shown in Fig. 6. In this mode, the streamer heads together carry so much charge that the electric field in the streamer channels and between them is completely screened. What fixes the streamer channel width  $w$ , is a classical mathematical question in a similar problem in two-fluid flow. It is found that similarly to this Saffman-Taylor finger problem, the streamer width  $w$  always approaches  $1/2$  of the period  $L$ , and that the field at the tip is enhanced by approximately a factor of 2. For details, we refer to [22].

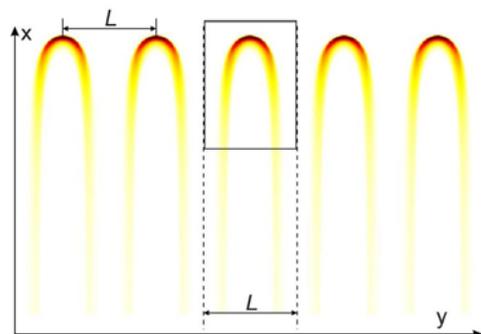

**FIGURE 6.** An array of streamers as simulated with a periodic boundary condition. It is found that the streamer separation is equal to the streamer diameter and that the electric field inside the streamer goes to zero due to screening. Figure taken from ref. [22].

## 5. CONCLUSIONS

- Possibilities to analyze pulsed corona streamer propagation in three dimensions with simulations and experiments are given.
- Stereophotography shows aspects of streamers that cannot be obtained from 2D images. In one case, it is clearly demonstrated that the apparent reconnection of two streamers is fake. This cannot yet lead to the conclusion that reconnection never exists; many more cases need to be analyzed. Further, branching angles are determined. Their value is  $43^{\circ} \pm 13^{\circ}$ , so there is a considerable statistical spread, but the angle seems to be independent of pressure and may slightly vary with position due to the shape of the E-field.
- Full 3D simulations of positive and negative streamers are possible now using a multiprocessor, pseudo-spectral method. The results show that streamers can repel each other due to electrostatic interaction or they merge when the absorption length for photoionization is long enough. First pictures obtained have a qualitative similarity with photos obtained from experiments, more work is required.
- An array of identical parallel streamers is simulated using a periodic boundary condition.

## ACKNOWLEDGMENTS

The work was supported by Stichting Technische Wetenschappen (STW-project 6501), part of the Dutch organization for scientific research, NWO.

## REFERENCES

- [1] T.M.P. Briels, J. Kos, E.M. Van Veldhuizen and U. Ebert, *J. Phys. D: Appl. Phys.* **39**(24), 5201-5210 (2006).
- [2] T.M.P. Briels, E.M. Van Veldhuizen And U. Ebert, *Positive Streamers In Ambient Air And In A Nitrogen-Oxygen-Mixture (99.8:0.2)*, *Ieee Trans. Plasma Sci.* [To Appear In June 2008].
- [3] A.V. Krasnochub, E.I.Mintousov, M.M. Nudnova And A.Yu.Starikovskii, *In Proc. 27th ICPIG, Eindhoven, The Netherlands, 18-22 July, 2005*, Ed. E.M. Van Veldhuizen (Tu Eindhoven, 2005), Available On: <http://www.icpig2005.nl>, Paper 04-312.
- [5] L.R. Grabowski, T.M.P. Briels, E.M. Van Veldhuizen And A.J.M. Pemen, *same as [3]*: Paper 04-425.
- [6] G.J.J. Winands, Z. Liu, A.J.M. Pemen, E.J.M. Van Heesch, K. Yan And E.M. Van Veldhuizen, *J. Phys. D: Appl. Phys.* **39**, 3010–3017 (2006).
- [7] U. Ebert, C. Montijn, T.M.P. Briels, W. Hundsdorfer, B. Meulenbroek, A. Rocco And E.M. Van Veldhuizen, *Plasma Sources Sci. Technol.* **15**, S118-S129 (2006).
- [8] N.Yu. Babaeva And G.V. Naidis, *J. Phys. D: Appl. Phys.* **29**, 2423 (1996).
- [9] A.A. Kulikovskiy, *J. Phys. D: Appl. Phys.* **33**, 1514 (2000).
- [10] S.V. Pancheshnyi, M. Nudovna And A.Y. Starikovskii, *Phys. Rev. E* **71**, 016407 (2005).
- [11] A.A. Kulikovskiy, *Phys. Lett. A* **245**, 445 (1998).
- [12] S. Pancheshnyi, *Plasma Sources Sci. Technol.* **14**, 645–653 (2005).
- [13] J.M. Park, Y. Kim, S.H. Hong, VIII Hakone, Puhajarve, Estonia, 2002, p. 104.
- [14] T.M.P. Briels, E.M. Van Veldhuizen And U. Ebert, *Positive Streamers In Air And Nitrogen Of Varying Density: Experiments On Similarity Laws*, *J. Phys. D: Appl. Phys* [To Appear In Aug. 2008], [Http:// ???](http://???).
- [15] D. Brewster *The Stereoscope: Its History, Theory And Construction* (John Murray, London 1856).
- [16] O.D. Faugeras *3D Computer Vision: A Geometric Viewpoint* (Mit Press, Cambridge, Mass., 1993).
- [17] J.M.K. Macalpine, D.H. Qiu and Z.Y. Li *Ieee Trans. Diel. El. Ins.* **6**, 331–336 (1999).
- [18] W.B. Ng And Y. Zhang, *Exp. Fluids* **34**, 484–493 (2003).
- [19] E. Thomas Jr., J. D. Williams and J. Silver, *Phys. Plasmas* **11**, L37 (2004).
- [20] S. Nijdam, J.S. Moerman, T.M.P. Briels, E.M. vanVeldhuizen and U. Ebert, *Appl. Phys. Lett.* **92**, 101502 (2008).
- [21] A. Luque, U. Ebert and W. Hundsdorfer, *Interaction Of Streamers In Air And Other Oxygen-Nitrogen Mixtures*, Revised for *Phys. Rev. Lett.*, [Arxiv:0712.2774v1](https://arxiv.org/abs/0712.2774v1) .
- [22] A. Luque, F. Brau, U. Ebert, *Saffman-Taylor Streamer Discharges: A Study On Interacting Streamers*, Revised For *Phys. Rev. E.*, [Arxiv:0708.1722v1](https://arxiv.org/abs/0708.1722v1) .
- [23] J. Moerman, *3-D Stereo Imaging Of Streamers*, TU Eindhoven, 2007, Internal Report: EPG 07-14.
- [24] M. Arrayás, U. Ebert, W. Hundsdorfer, *Phys. Rev. Lett.* **88**, 174502 (2002).
- [25] C. Montijn, U. Ebert, W. Hundsdorfer, *Phys. Rev. E* **73**, 065401 (2006).
- [26] Y.L.M. Creighton, PhD Thesis, TU Eindhoven, 1994: <http://Alexandria.Tue.Nl/Extra3/Proefschrift/Prf10a/9402886.Pdf> .